


MULTIGLIDE[™] DOORS

Architectural Collection

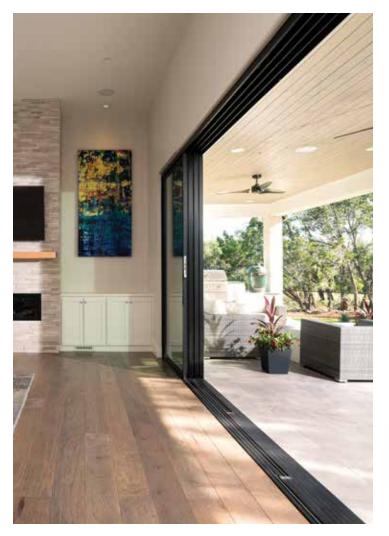


CONTEMPORARY & TRADITIONAL STYLES

Contemporary panels are available in an all aluminum design or aluminum-clad wood design and feature a 2 ¾" profile.

Traditional panels are available in an aluminum-clad wood design and feature 4 11/16" stiles and 4 11/16", 8" or 12" bottom rail heights.

DOOR CONFIGURATIONS

One-directional and two-directional stacking and pocketing configurations available.



Stacking & pocketing configurations up to 12 panels wide

WALK THROUGH WALLS

The MultiGlide[™] door not only connects a home to the outdoors, it can be customized to fit any home's design. Beyond offering ultimate design freedom, it's engineered for smooth, easy operation with seamless transitions.

KEY FEATURES

- Fits openings up to 50' wide and 10' tall*
- Panel widths 28" to 60" wide and 47 ½" to 116 ½" tall (47" to 117" for flush sill options)*
- Rated for air, water and structural performance[†]
- Thermally controlled option is available for increased performance with clad wood panels only
- Available with all standard Andersen glass options including triple-pane glass
- Aluminum framed bottom gliding insect screens available featuring 2³/4" even sight lines and synthetic rollers

SILL OPTIONS

On-Floor Drainage Sill Options



Raised Threshold







Flush Sill

Designed to only project 3/16" above the finished floor. Material between rails shown to represent flooring.

ROLLERS

Continuously adjustable synthetic rollers are cycle tested 25,000 for proven operation, feature stainless steel ball-bearings and are contoured perfectly to match the track to increase ease of operation.

AUTOMATED OPEN/CLOSE SYSTEM^{††}

Exterior Ramp

Automated open/close system is available on both stacking and pocketing door configurations and is operated using an interior touchpad and weatherproof exterior secure keypad. It can also be connected with a home automation system.



MULTIGLIDE[™] DOORS



